

SPECIFICATION SHEET: CENTRIFUGAL FAN 337MM (3 PHASE)

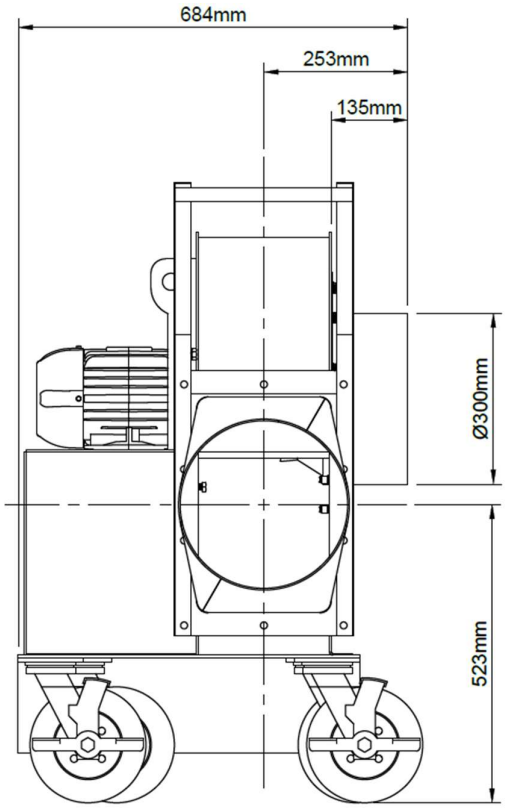


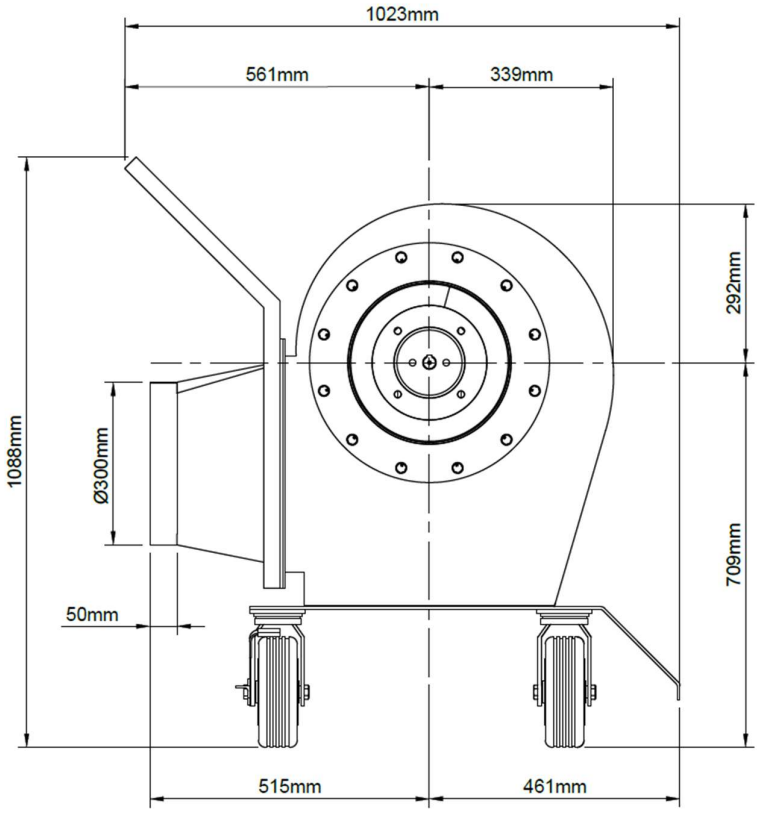


SPECIFICATIONS


Airflow (m^3/hr):	5,800
Motor Power:	2.2kW, 2900rpm
Current Draw:	4.8A
Voltage & Connection	415V, 3 Phase, 32A, 4 Pin
Duct Diameter:	300mm
Dimensions LxWxH (mm):	1023 x 684 x 1088mm
Weight:	100kg
Lifting Method:	Forklift/Lifting Slings
Options:	Silencers Zones 1/2/21/22 20 Amp Plug Speed Controller
Temperature:	Range: -20°C to +55°C **High-Temperature available on request*

FAN CURVE

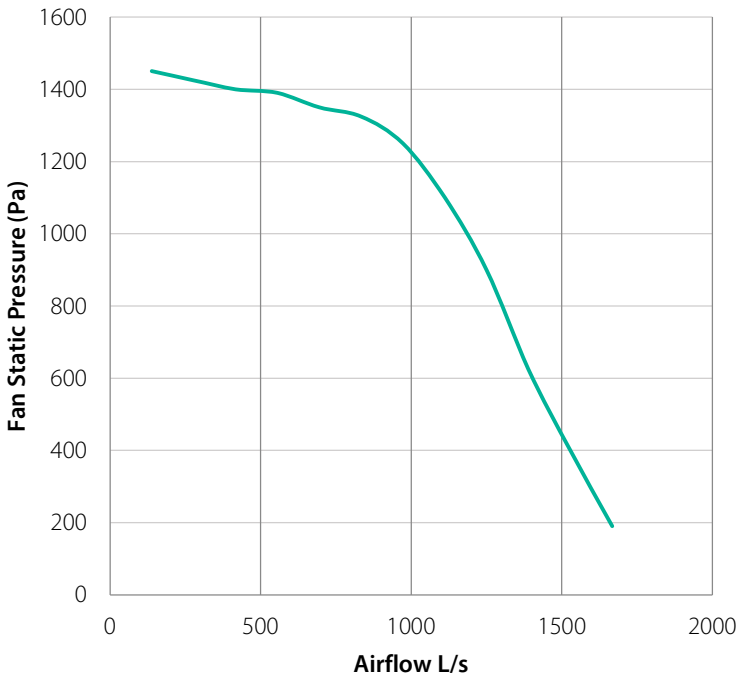

SPECIFICATION SHEET: CENTRIFUGAL FAN 337MM (SINGLEPHASE)

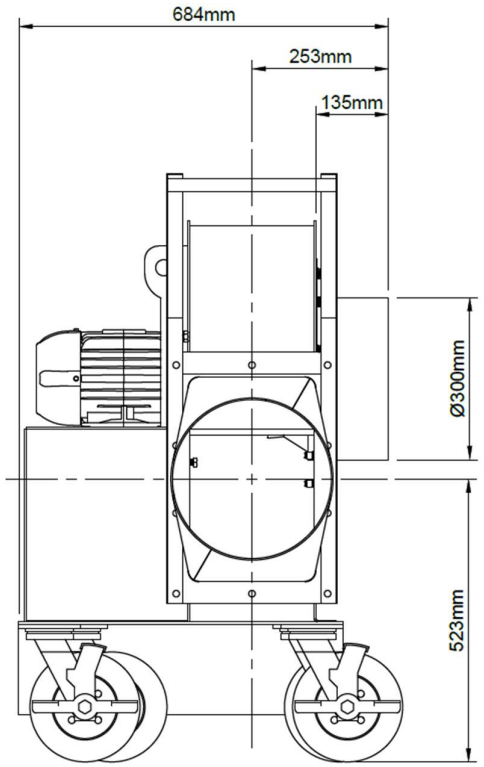

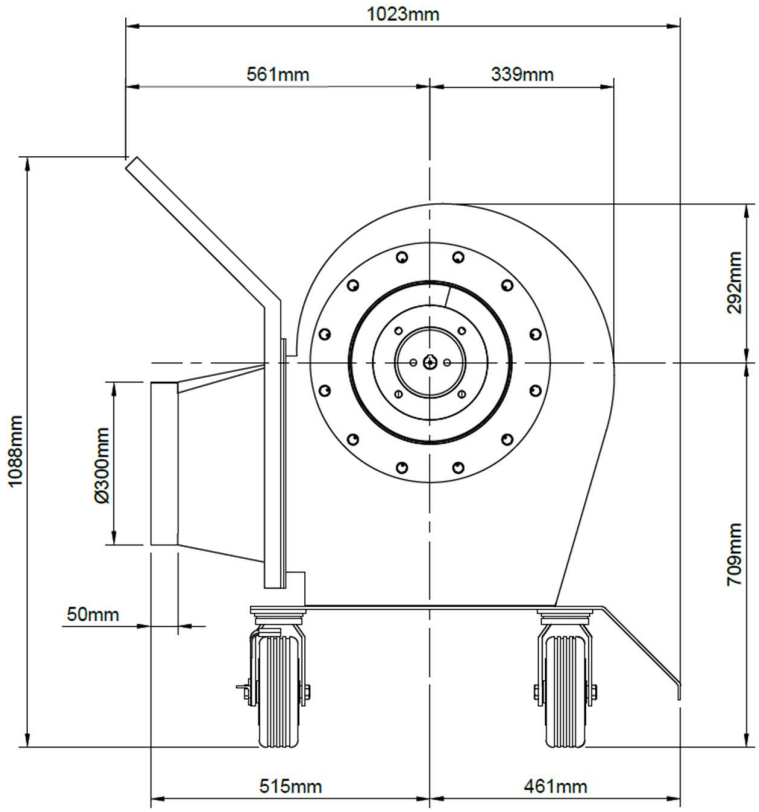

SPECIFICATIONS

Airflow (m^3/hr):	5,800
Motor Power:	2.2kW, 2900rpm
Current Draw	4.8A
Voltage & Connection	240V, 1-Phase, 10A
Duct Diameter:	300mm
Dimensions LxWxH (mm):	1023 x 684 x 1088mm
Weight:	100kg
Lifting Method:	Forklift/Lifting Slings
Options:	Silencers Zones 1/2/21/22 20 Amp Plug Speed Controller
Temperature:	Range: -20°C to +55°C **High-Temperature available on request*

FAN CURVE

